


TOWN OF EAST HARTFORD

Temporary Patch Treatment

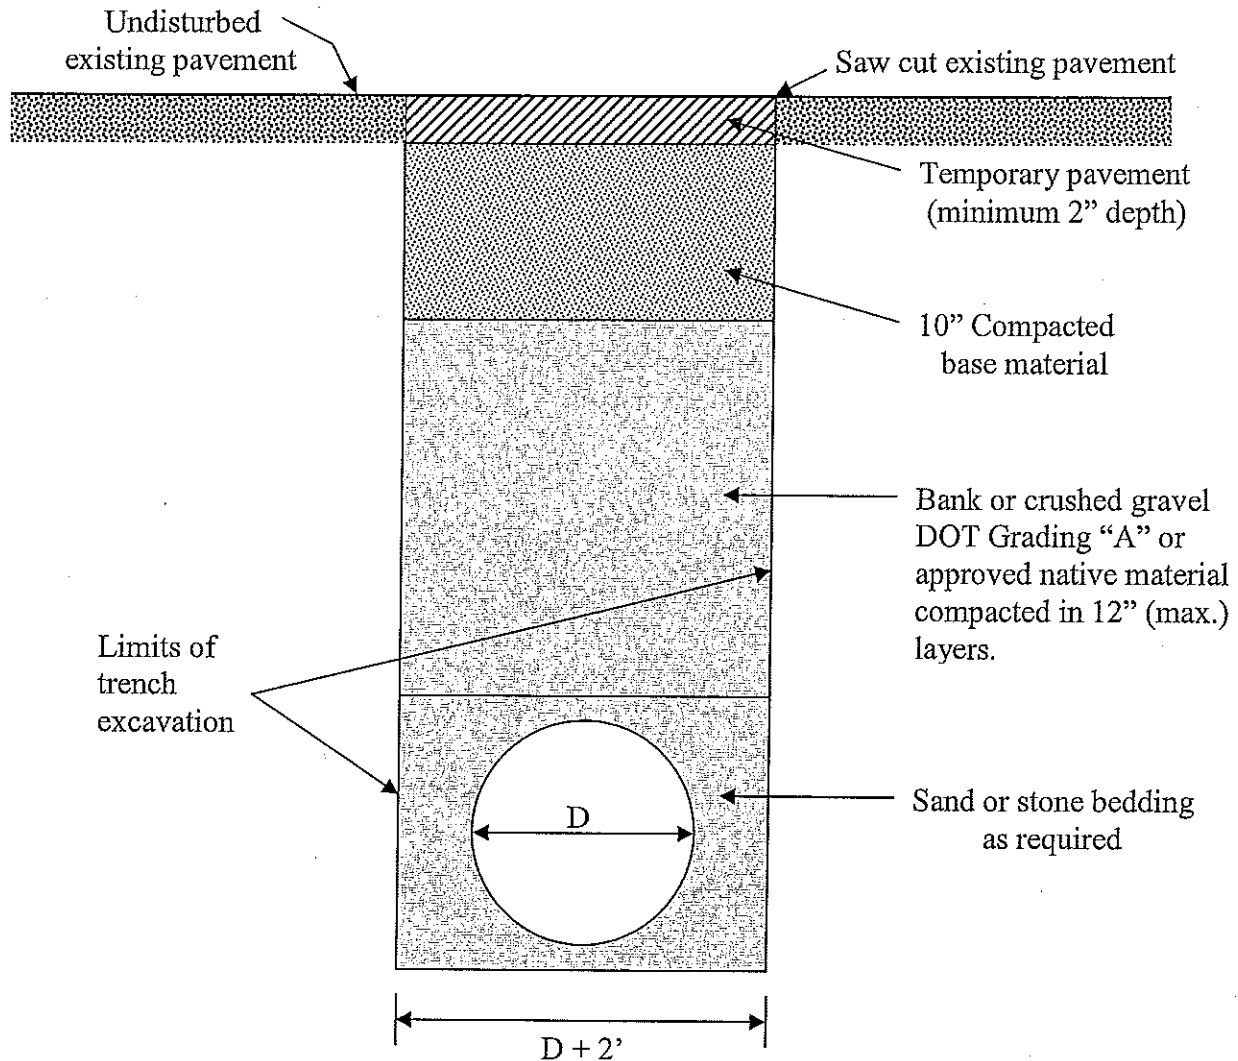

Temporary Patch:

1. **Pavement** – Temporary hot mix bituminous concrete pavement shall be placed with a minimum thickness of two (2) inches immediately following backfilling and compaction of the trench, or as directed by the Town Inspector. No excavation will be allowed on Friday unless it is to be paved by the end of the work day. No cold patch will be allowed for any temporary repair.
2. **Base Material** – The excavated materials will be acceptable for use as base material if approved by the Town Inspector. If the material is unacceptable, ten (10) inches of processed aggregate stone base compacted in two (2) equal lifts will be required.
3. Steel plates to temporarily cover excavations may be used if approved by the Town Inspector. Plates must be anchored securely to the surrounding pavement and ramped with bituminous concrete. No plates will be allowed between November 15 and April 1.